

41B Series – Specifications

Case – Machined from solid extruded brass.
 Standard finish is 626 satin chromium plated.
 Width – 1 15/16"
 Length – 2 1/16"
 Thickness – 7/8"

Shackle – The shackle locks at both heel and toe.
 The length of shackle opening is measured from top of case to inside of shackle when padlock is locked.

Material – Stainless steel

Diameter – 3/8"

Width of opening – 7/8"


ASTM F883 – Meets Grade 3 with stainless steel shackle, grade 4 with XSPL shackle.

ASTM F883 – Meets Grade 6 for option E. (Corrosion resistance).

ASTM F883 – Meets Grade 6 for shackle cutting force with XSPL shackle option



41B Padlock

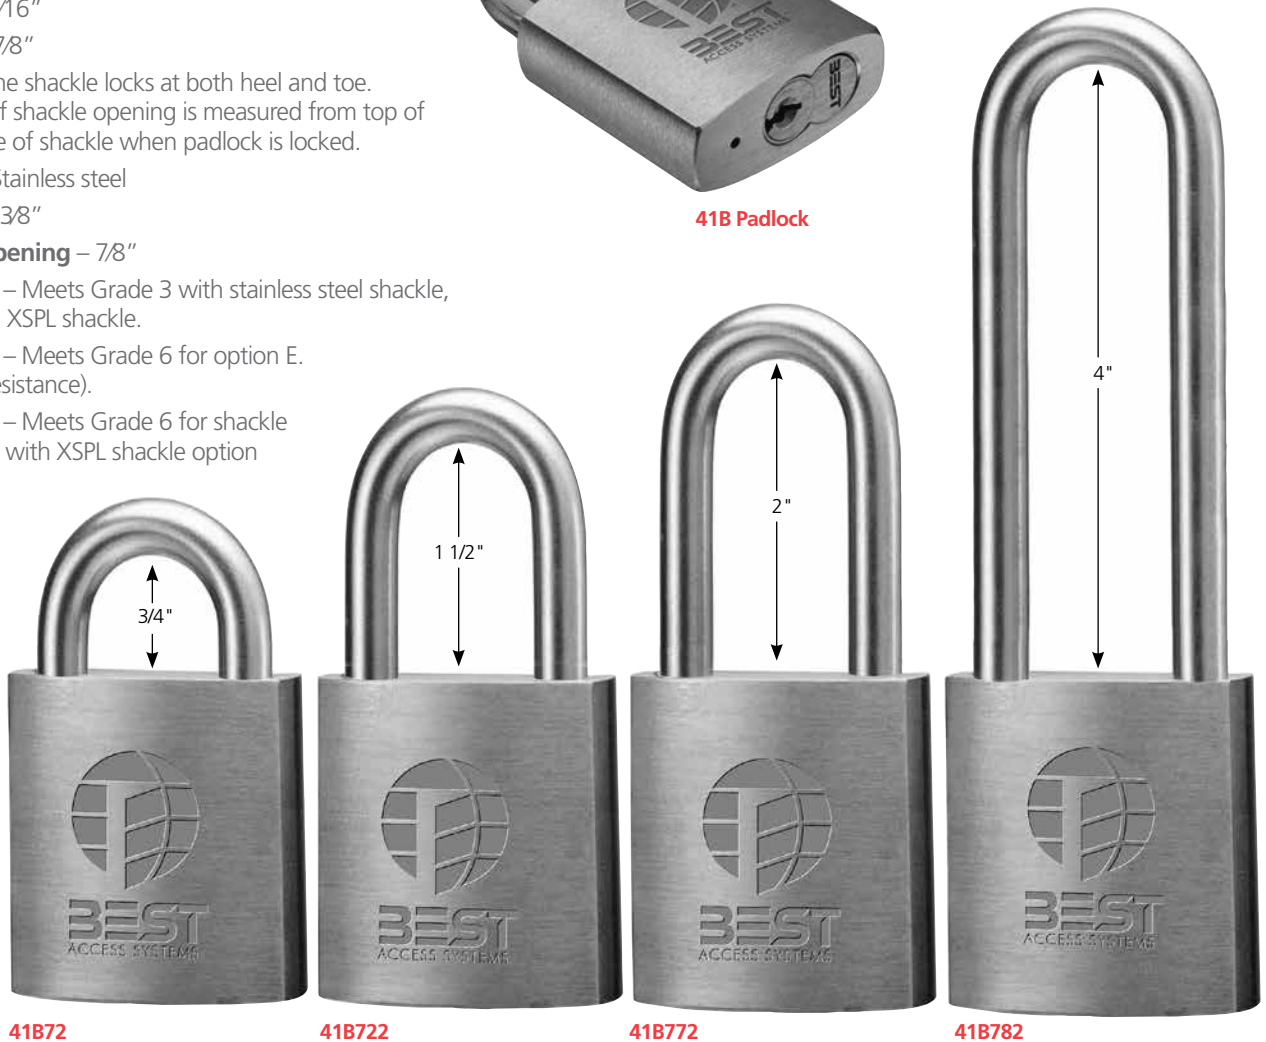

41B72

41B722

41B772

41B782

41B How to Order

41B	7	2	T			
Series	Core Housing	Shackle Height	Function Code	Chain Option	Special Stamp No.	Options
41B – brass 3/8" diameter	7 – 7 pin housing all BEST® cores	Steel 2 – 3/4" 22 – 1 1/2" 72 – 2" 82 – 4" Brass 0 – 3/4" 20 – 1 1/2" 70 – 2" 80 – 4"	T – key retained L – non-key retained	M – case drilled for chain M1 – bronze chain M5 – galvanize steel chain with gray polycoating	Blank – BEST® logo Specify padlock stamp number or describe stamp. Price for special stamps on request.	606 – satin brass S – car seal slot WC – weather cover XSPL – cut resistant shackle
				page 8	page 8	page 6–9