


DB1000 Series

Grade 1 deadbolt

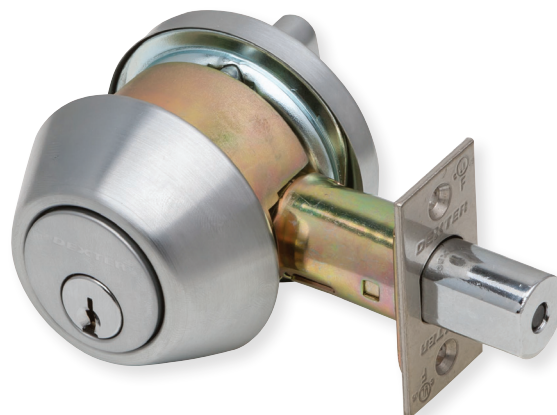

Specifications

- Grade 1, UL listed 3 hour, 1³/₈" - 1⁷/₈" standard cylinder door range; 1⁵/₈" - 2" SFIC door range
- All functions include 2³/₈" - 2³/₄" universal square corner latch (p/n 30-253), 1¹/₈" x 2³/₄" square corner lipless strike
- Schlage C cylinders are 6-pin cylinders keyed 6, keyed different
- Accommodates SFIC to accept 6-pin/7-pin

DB1000-SCT-626-KDC	Single Cylinder x Turn	626	6-pin, Schlage C, KD
DB1000-SCT-613-KDC	Single Cylinder x Turn	613	6-pin, Schlage C, KD
DB1000-SCT-626-SFIC	Single Cylinder x Turn	626	Less SFIC
DB1000-SCT-613-SFIC	Single Cylinder x Turn	613	Less SFIC
DB1000-DCT-626-KDC	Double Cylinder	626	6-pin, Schlage C, KD
DB1000-DCT-613-KDC	Double Cylinder	613	6-pin, Schlage C, KD
DB1000-DCT-626-SFIC	Double Cylinder	626	Less SFIC
DB1000-DCT-613-SFIC	Double Cylinder	613	Less SFIC

Finishes



613



626